


Telescopic gate 60 mm tubular pipe 4.0 - 5.0 m

25-TGL500

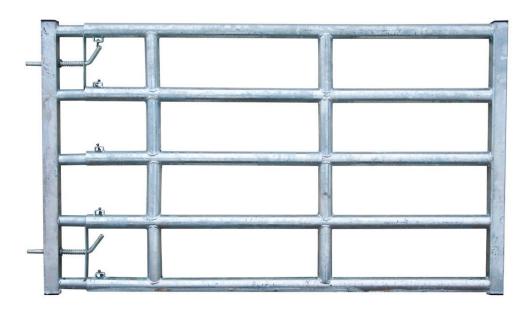

Sturdy telescopic gate that can withstand a pressure of 120 kg

- Sturdy gate that can withstand a pressure of 120 kg
- Opens 5.0 4.0 m
- Adjustable hinge eyelets
- Height 110 cm
- Tubing dimension, female part 60 mm
- Tubing dimension, male part 48 mm
- Wall mounts is sold seperat

The telescopic gates are suitable for passages that need to be opened and closed, both in livestock housing and outdoors. This gate is suitable for use when you have heavier animals. Delivered with double, spring locking mechanism.

The gate is galvanized for a long service life.

The gate is available in the following lengths:

- 2,0 3,0 metres read more here
- 3,0 4,0 metres read more here
- 4,0 5,0 metres

TECHNICAL DATA

Between pipes 220 mm

Pipe dimension 60 mm

Total height 1,100 mm

Total length 4,000 - 5,000 mm

Weight 121 kg

The gate is mounted with two wall mounts (not included), these are available as accessories.

Accessories

Extend your application with these practical accessories.

34-FT40 Feed trough, 40 | **05-VFTGS-2 34-FT140** Feed trough, 140 | **34-FTH** Wall mount gate hinge, 2-pcs Feed trough for roughage